

PYRAMID SCHEME Series

# DROP STACK
Installation

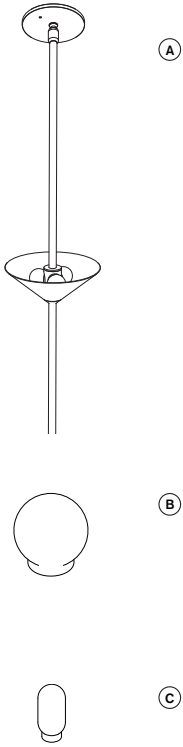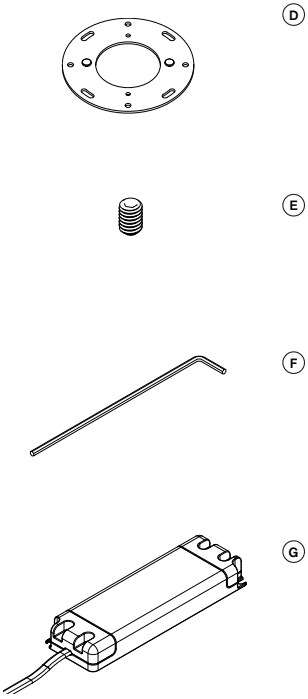



**required for 12V option

## COMPONENTS

A. Fitting
B. Glass Surround
C. Lamp (G4 / 12V LED)
D. Mounting Plate
E. Grub Screw
F. Hex Key
G. LED Driver 12V LED

---

**Not supplied:** Ceiling Fasteners [×2] to be supplied by the site installation team to ensure suitability for the wall substrate, installation conditions and applicable local regulations.




12V driver location

Step 1. Wire the power-in side of the Driver ⓖ into mains power. Wire additional cable from power-out /12V side of driver.


Step 2. Mount/ place driver ⓖ into cavity while leaving additional cable accessible.

---

Installation must be completed by a licenced electrician and in compliance with all local laws and regulations.

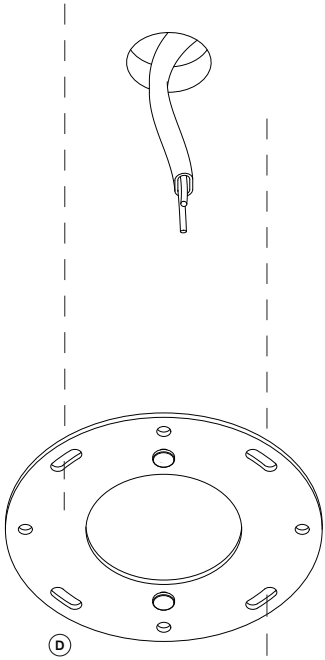



Step 3. Mark the location of the screw holes on ceiling using the Mounting Plate Ⓓ as a template.

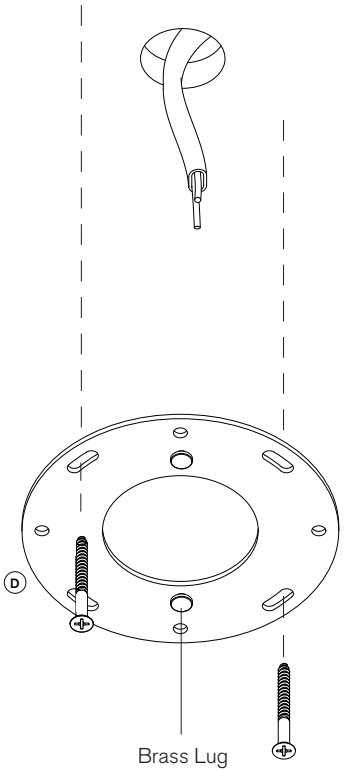



Step 4. Attach Wall Mount Assembly Ⓓ to wall with Wall Fasteners [minimum ×2, please see additional note on Page 2]. Ensure brass lugs of Mounting Plate Ⓓ are horizontal (as above).


Step 5. Feed cable through opening in Backing Plate Ⓓ and let hang.

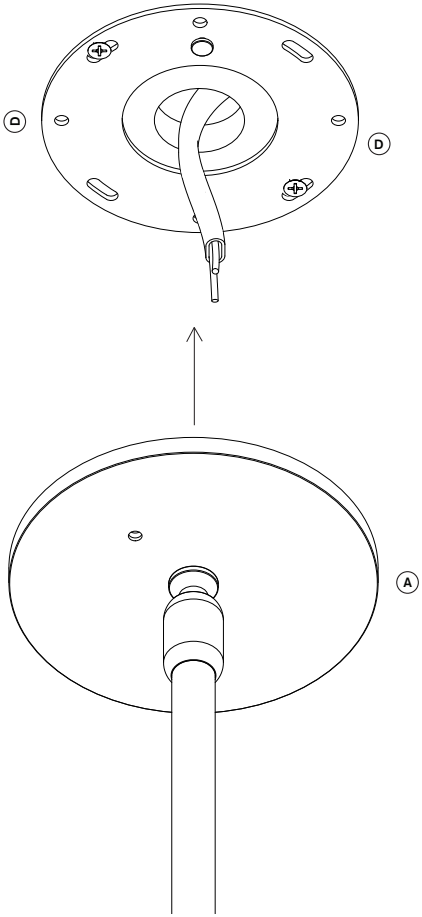



Step 6. Hard-wire the active and neutral electrical cables from the Wall Light Assembly Ⓐ to mains power in wall (installing electrician to supply terminal block).

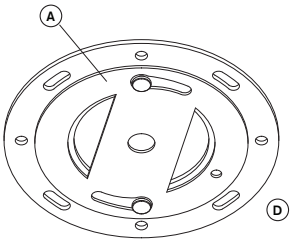



Backing Plate and Fitting alignment
pre 30° anticlockwise rotation.

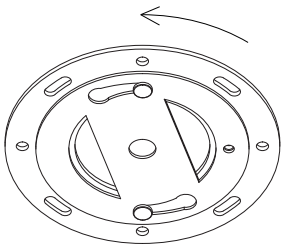


Backing Plate and Fitting alignment
after 30° anticlockwise rotation.

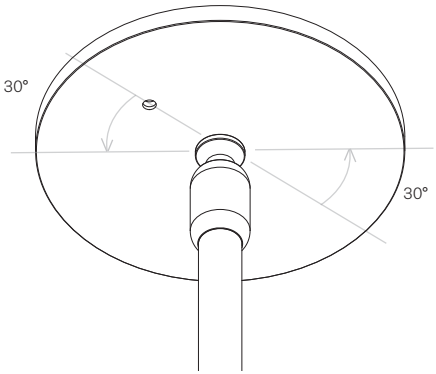

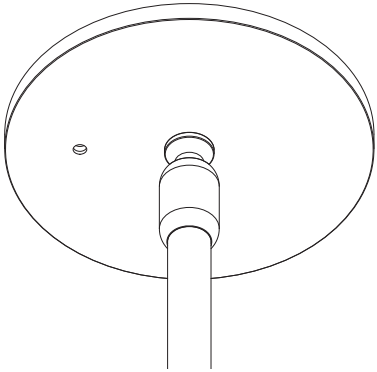



Step 7. Guide Wall Light Assembly Ⓐ onto Backing Plate Ⓓ 30° off vertical alignment, see diagram.

Step 8. Align the slotted recess in back of Ⓐ over brass lugs on Ⓓ and twist 30° anticlockwise until grub screw hole is at the bottom of the mount fascia

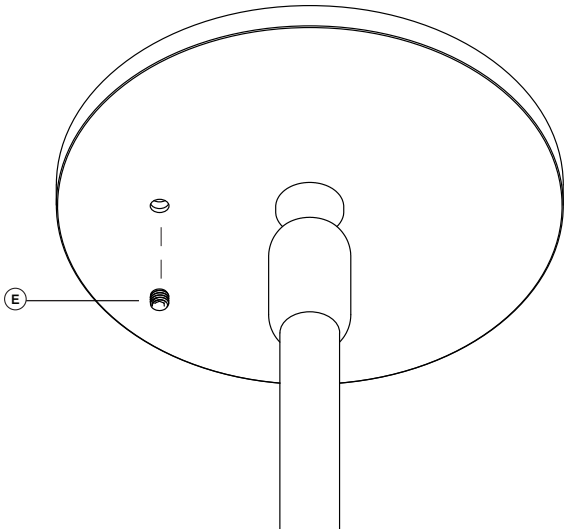


Step 9. Insert Grub Screw Ⓔ into fascia plate of Ⓐ and fasten clockwise with Hex Key Ⓕ to stop rotation of fitting. If Ⓔ does not engage thread in Ⓓ rotate Ⓐ slightly until thegrub screw engages thread.

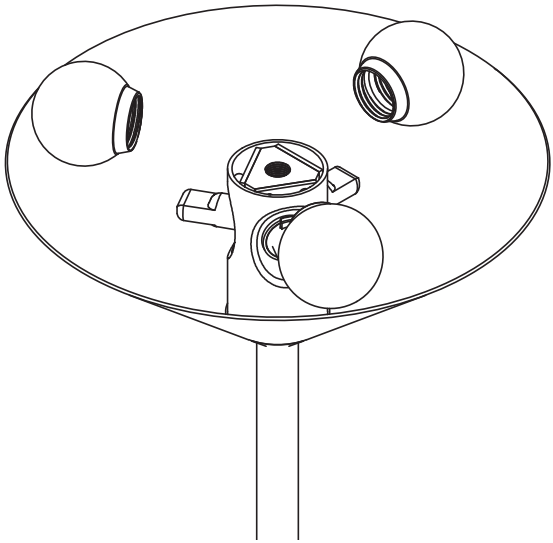

Step 10. Insert Bi Pin Ⓒ into Lamp Holder as per the diagram. Ensure prongs from Ⓒ are aligned with holes in the lamp holder.

Step 11. Insert Lamp Surround Ⓑ over Ⓒ and gently fasten clockwise until resistance is encountered.

Step 12. Repeat Steps 10 and 11 for each lamp (3x per cone) and each cone in the stack.

