



CHAIN Series


ONLY U
Installation










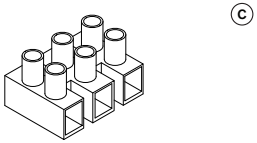


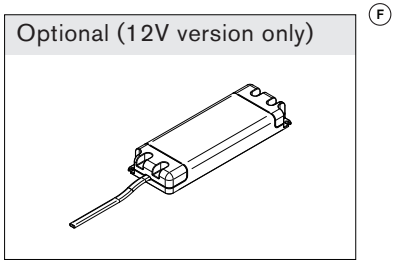

COMPONENTS

A. Wall Light Assembly
B. Wall Mount
C. Terminal Block
D. M4 Slotted Head Fastener (x2)
E. G95 Lamp (x2)
F. 12V Driver (for 12V option)


Not supplied: Wall Fasteners [×2] to be supplied by the site installation team to ensure suitability for substrate, installation conditions and applicable local regulations.

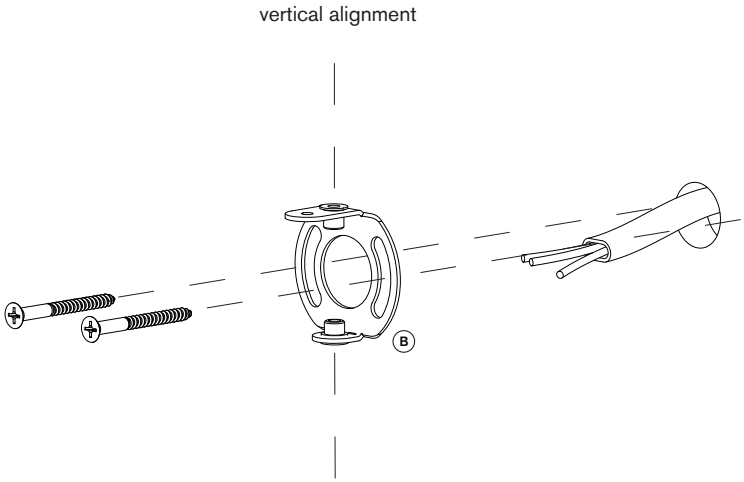

Step 1. 240V version: Mount Wall Mount Ⓑ in position (over mains wiring) with suitable fasteners. Ensure the mounting holes are aligned vertically. If the mounting holes are not vertical, loosen fasteners and rotate plate until aligned and re fix.


12V versions: install 12V Driver Ⓕ first (up to 10m away from fitting) and route low voltage supply cable to install location. Once completed, then install Ⓑ in place as per diagram.

Installation must be completed by a licenced electrician and in compliance with all local laws and regulations.

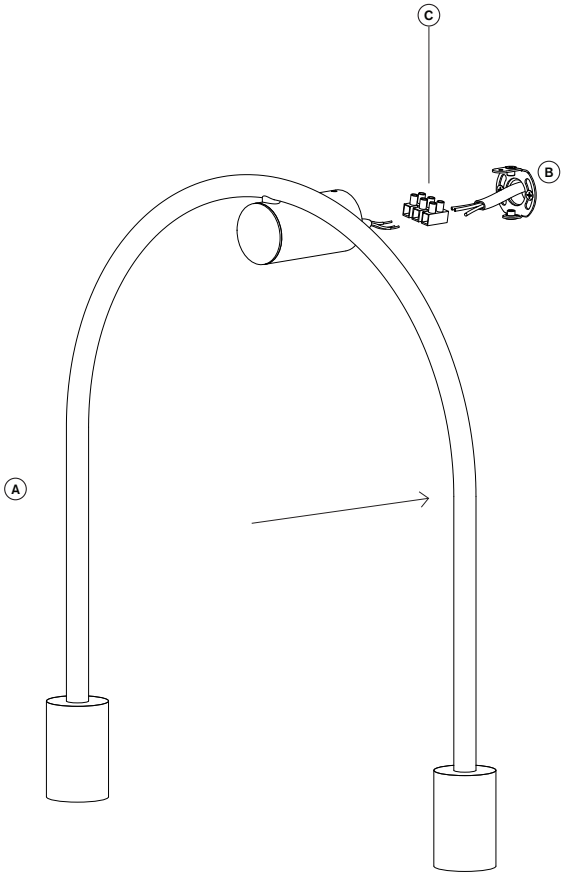


Step 2. Connect the wiring from the Wall Fitting Ⓐ to mains wiring with the Terminal Block Ⓒ provided.

Step 3. Once connected, guide Ⓐ over Ⓑ, feeding the excess cable into the wall cavity and fitting as required.

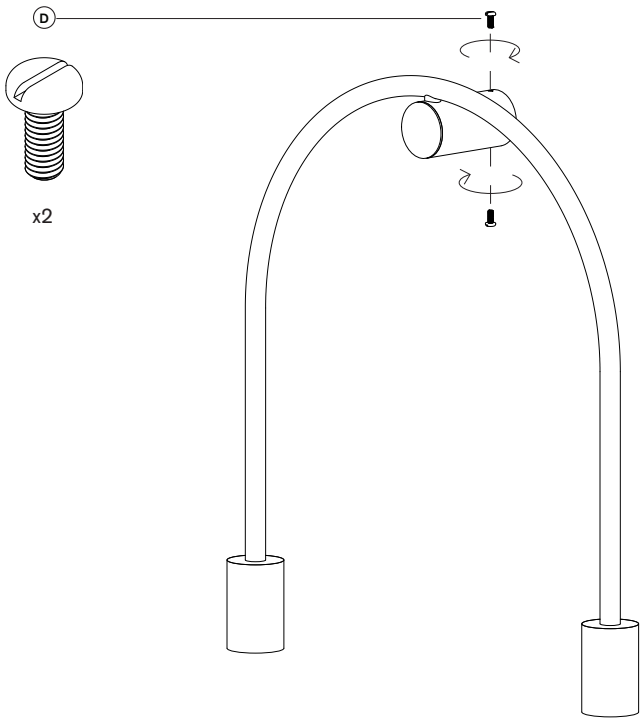


Step 4. Locate the vertical mounting holes (top and bottom) of Ⓑ through Ⓐ and insert the M4 Slotted Head Fasteners as per the diagram Ⓓ. Fasten clockwise until firm.

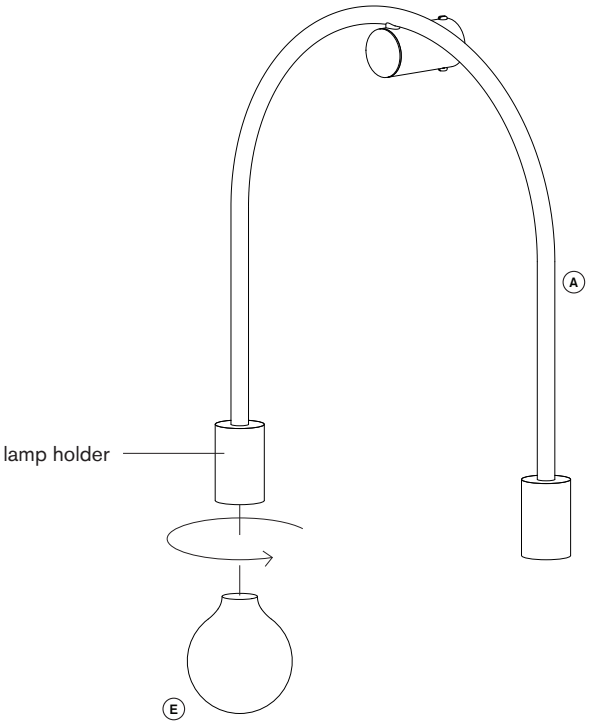

Step 5. Insert the G95 Lamp Ⓔ into the lamp holder of Ⓐ and gently fasten clockwise until you encounter resistance.

Step 6. Repeat Step 5. on the remaining side.

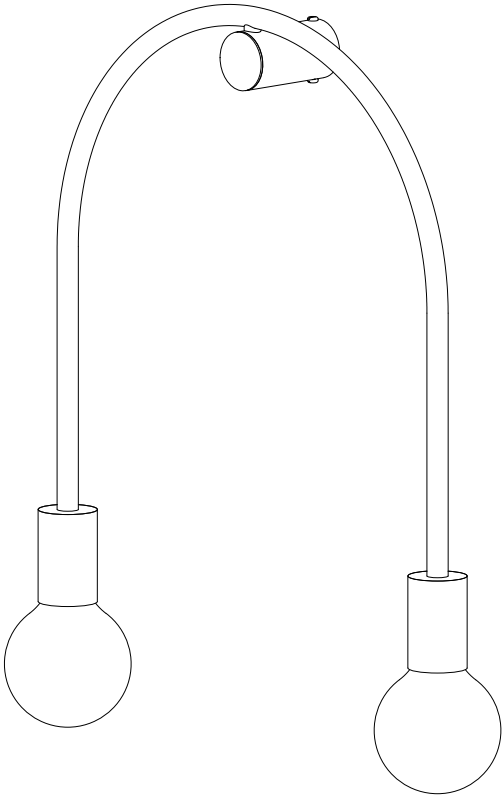

Step 7. Test fitting, and enjoy.

